



**CUBRO**  
NETWORK VISIBILITY

# EXA32400



```
01001011101
00010010001
00100100001
01001001010
```

---

## DATA SHEET

# Advanced Network Packet Broker At a glance

## Definition

An Advanced Network Packet Broker is a switch-like device purpose-built to receive traffic from a variety of network sources (live link, TAPs, SPANs, mirror ports) and to filter, duplicate, and/or aggregate that traffic to monitoring and security tools.

## Advantages of EXA32400

- Filters and load-balances traffic from 100 and 400 Gbps links to multiple monitoring tools
- Aggregates multiple 100 Gbps links to 400 Gbps output ports
- 32 x 100/400 Gbps (QSFP28/ QSFP-DD)
- QSFP-DD ports support breakout to 4 x 100G
- Supports data burst buffering
- Packet slicing support (any configurable packet size)
- IPv6 support
- Tunnel header stripping
- No additional port licensing fees or software feature licensing. All features and applications included in the unit price.
- 2-year base warranty period

## Product Overview



The EXA32400 is a high-performance advanced network packet broker that aggregates, filters, duplicates, and load balances network traffic to security, monitoring and management tools. The EXA32400 is based on programmable switching fabric. It is based on an advanced multi-core, industry leading programmable switch chip architecture. This platform allows all filtering features to be implemented at the hardware level for unmatched throughput and performance. The EXA32400 enables high-performance deep protocol identification and processing, and data message pre-processing at the chip forwarding logic level. The multi-layer filtering capabilities of the EXA32400 is a powerful feature of this device which enables enhanced network visibility and better network performance.

## Functions / Benefits:

- Easy to configure: secure Web GUI / ReST API and CLI
- Load balancing: hash-based, session aware load balancing on either outer or inner tunnel headers
- Ultra high port density: supports up to 32 x 400 Gbps or 128 x 100 Gbps ports
- Tunnel termination and filtering on multiple parameters including inner tunnel (VXLAN, GTP, ERSPAN, CFP, MPLS, etc)
- More than 100000 simultaneously filtering rules without performance restrictions to see the traffic that is really needed
- ASCII string filtering inside the payload
- SNMPv2c and SNMPv3 support
- Straight and easy development of filtering strings using MS Excel with download function.

## Product Capabilities / Features

Link/Port Aggregation	Aggregation many to any, and any to many at all link speeds
100G distribution/load balancing	Traffic can be easily distributed across 100 Gbps ports to monitor 400 Gbps links.
Jumbo Frame Support	The EXA32400 supports jumbo Ethernet frames with a size of up to 9192 bytes.
Support of IPv4 and IPv6	Yes
Ports	32 x 100G/400G via QSFP28/QSFP-DD Break-out to 128 x 100 Gbps 1 x 10/100/1000 Base-T (Management) 1 x RS232 Console
Configuration Communication	/ Web GUI, REST API, CLI
Performance	25,6 Tbps backplane 100% throughput without any packet loss 6,0 Billion PPS
Aggregation latency	Average < 700 ns for 64-byte frames
MTBF	200.742 hours
Packet Buffer	30 MB
Different Power Versions	Dual 100-240V AC or 36-72V DC available

## Technical Data / Specifications

### Inputs\*

32 x 100 Gbps / 400 Gbps full duplex Ports for any kind of QSFP28/QSFP-DD

\* Each port can be input and / or output depending on the application and configuration

\*All QSFP-DD ports support break-out cables to 4x100G interfaces

### Outputs\*

32 x 100 Gbps / 400 Gbps full duplex Ports for any kind of QSFP28/QSFP-DD

\* Each port can be input and / or output depending on the application and configuration

\*All QSFP-DD ports support break-out cables to 4x100G interfaces

## Performance

- Performance up to 25,6 Tbps
- 6,0 Billion PPS
- Non-blocking design
- Boot time from power on to working 180 sec

## Management

- Management Port: (1) RJ45 10/100/1000 Mbit Configuration
- Easy to use Web UI, REST API, CLI

## Operating specifications:

Operating Temperature: 0°C to 40°C  
Storage Temperature: -10°C to 70°C  
Relative Humidity: 10% min, 95% max (non-condensing)

## Mechanical specifications:

Dimension (WxDxH): 442 x 580 x 44 mm  
Weight: 11,8 kg  
Airflow: Front-back

## Electrical specifications:


Input Power: 100-240V AC or 36-72V DC  
Maximum Power Consumption: 850W

## Certifications:

Fully RoHS compliant  
CE compliant  
Safety - UL 60950-1 / CSA C22.2 60950-1-07 / IEC 62368-1: 2014 EN 62368-1: 2014


# Deduplication by filtering in VXLAN overlay networks (VXLAN VNI and IP filtering)

Usually, the duplicate traffic is caused by picking up the same traffic more than once due multiple tapping and/or aggregation devices.

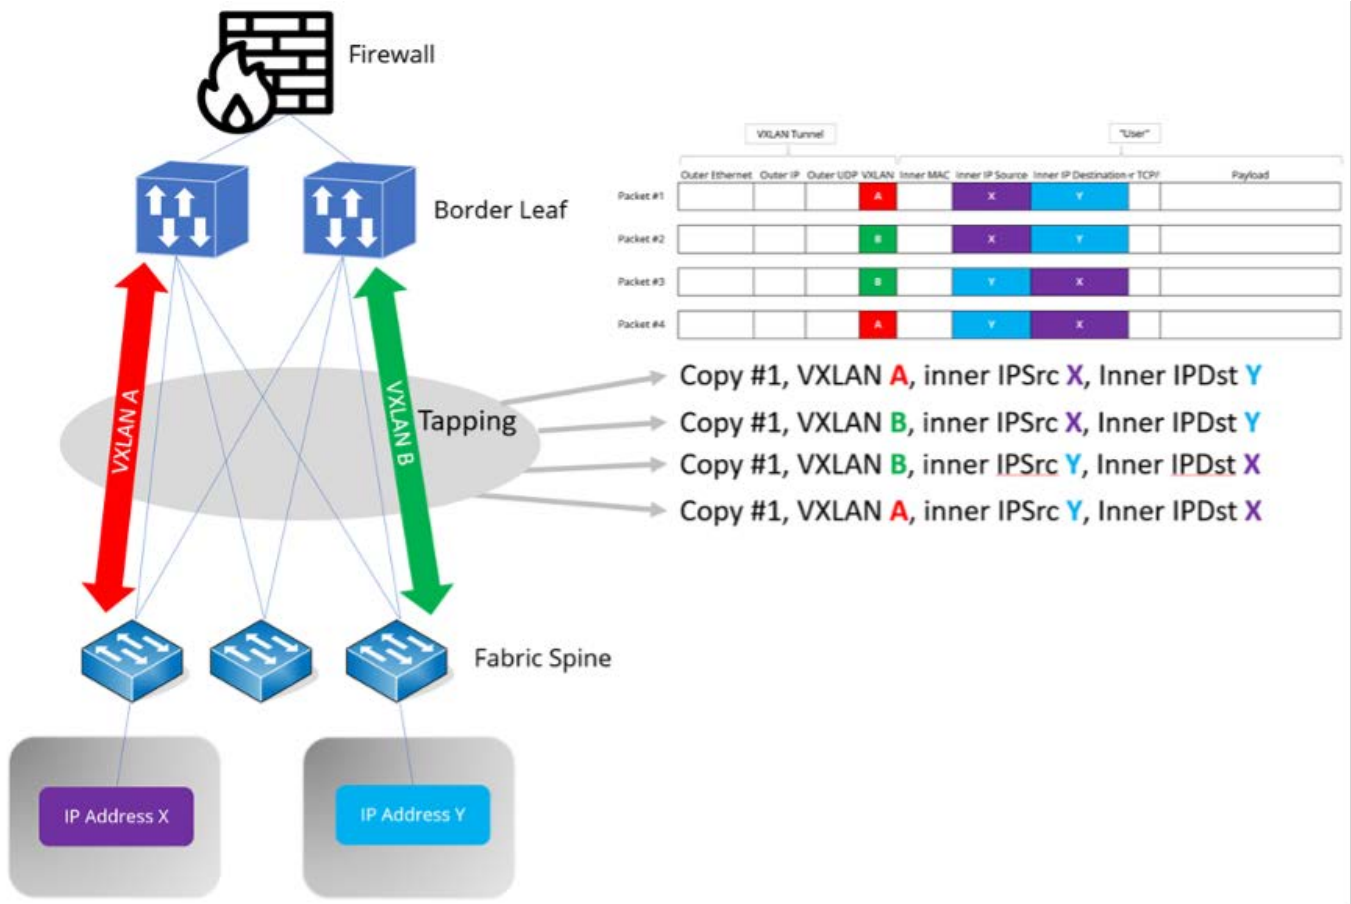


Traffic between IP X and IP Y passes the tapping two times and thus the same packets are visible twice at the tapping output. From user perspective every packet is received twice. The EXA32400 offers an easy and straight-forward way to eliminate the duplicates by allowing filtering VXLAN VNI and inner IP simultaneously.

	Outer Ethernet	Outer IP	Outer UDP	VXLAN	Inner MAC	Inner IP Source	Inner IP Destination	Network Broker Probe ACTION
Packet #1				A		X	Y	drop
Packet #2				B		X	Y	forward
Packet #3				B		Y	X	forward
Packet #4				A		Y	X	drop

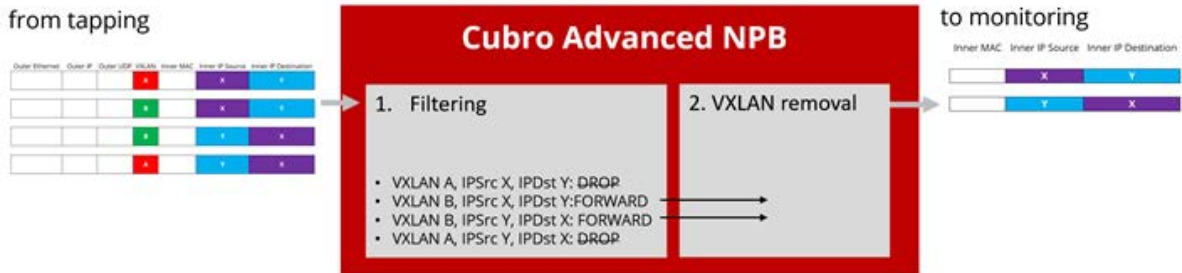


VXLAN VNI and inner IP filtering:

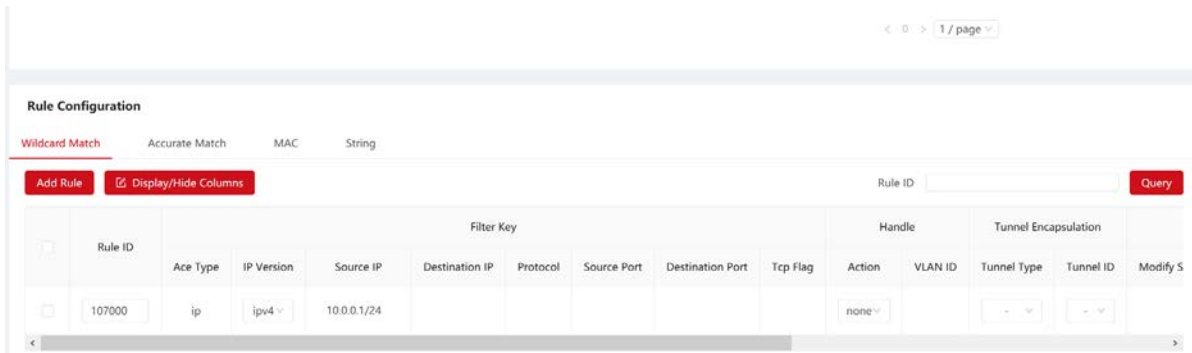

## State-of-the-art tunnel functionality

The EXA32400 supports the termination of various tunnels such as:

- ERSPAN II and III
- GRE
- MPLS over UDP and MPLS over GRE
- GTP
- VXLAN
- IPinIP
- CFP

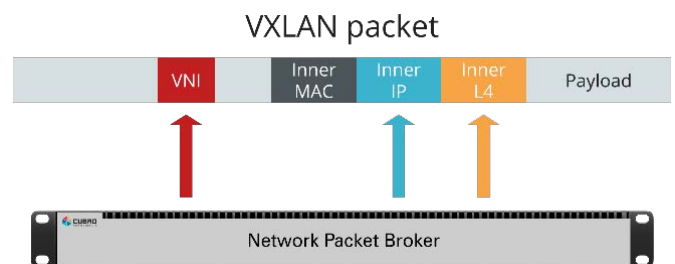

Every port of the EXA32400 supports an independent MAC and IP setup. Thus, the EXA32400 can be used as an active tunnel end-point. Beside tunnel termination it also allows filtering inside tunnels.


This superior functionality makes the EXA32400 perfectly suited for any modern overlay network.

## GRE Encapsulation Function

To transport filtered packets from site A to site B over a routed Layer 3 network, the EXA32400 supports a GRE encapsulation function.

GRE Tunnel Port


ID	Port ID	Local MAC	Remote MAC	Local IP	Remote IP
1		000000000001	000000000002	1.1.1.1	1.1.1.2

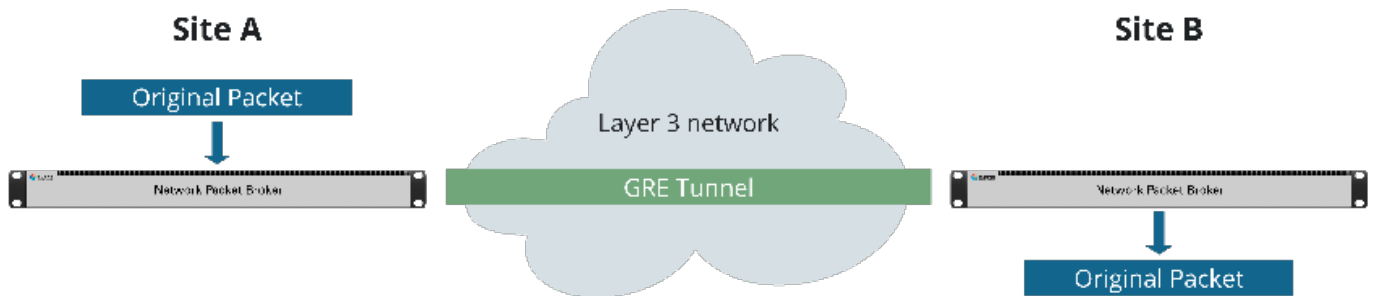

## GTP user-plane load-balancing

User-data interfaces in mobile networks such as S1-U are usually heavily loaded carrying up to Tbps of data. To make analysis possible these user-data needs to be spread across many analyzers and thus load-balancing is a key criteria. In order to keep the efforts for the analyzing/probing part as low as possible it is extremely important that user sessions stay together so that every packet of a user session arrives at the same analyzer interface.


The Cubro EXA32400 distributes the packets based on a hash-key. The best choice for mobile user-data is that this hash-key is based on the inner IP address (=user IP) of the arriving packets. The EXA32400 handles inner IP load-balancing in hardware and supports Tbit/s of processing power.

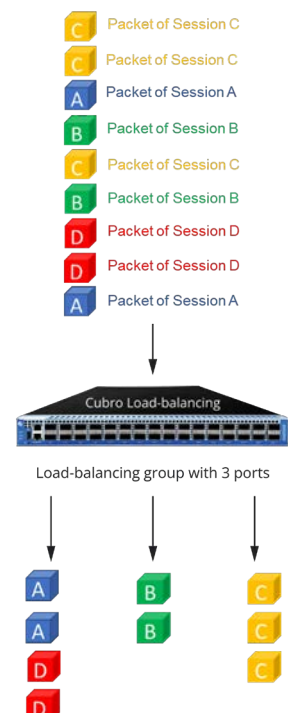

## Web User Interface

The EXA32400 features an extremely easy to use graphical way of operation.


The innovative and logical WebUI allows the user to create a backup, setup new users, check port link status/statistics or define a powerful filtering scenario which will help to do the job quickly.

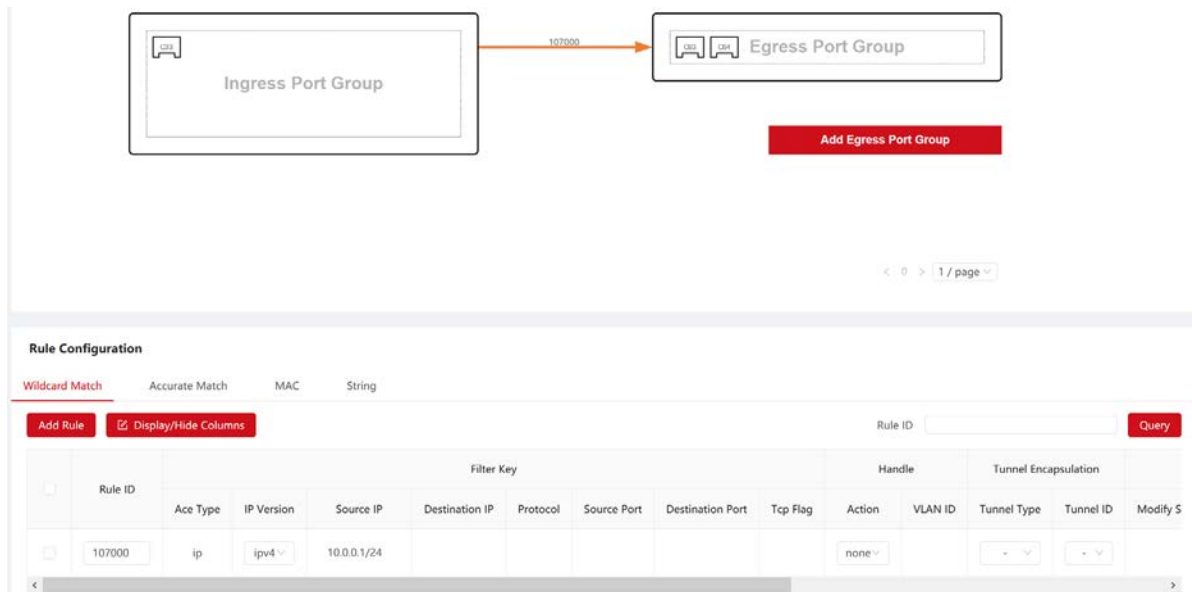

The screenshot displays the Web User Interface for the EXA32400. At the top, there is a diagram showing an 'Ingress Port Group' connected to an 'Egress Port Group' via a link labeled '107000'. Below this, there is a red button labeled 'Add Egress Port Group'. The main section is titled 'Rule Configuration' and includes tabs for 'Wildcard Match', 'Accurate Match', 'MAC', and 'String'. There are buttons for 'Add Rule' and 'Display/Hide Columns'. A table lists the configured rules:

Rule ID	Ace Type	IP Version	Source IP	Destination IP	Protocol	Source Port	Destination Port	Tcp Flag	Action	VLAN ID	Tunnel Type	Tunnel ID	Modify S
107000	ip	ipv4	10.0.0.1/24						none		-	-	

Filters can also be created using Microsoft® Excel and uploaded to the EXA32400.

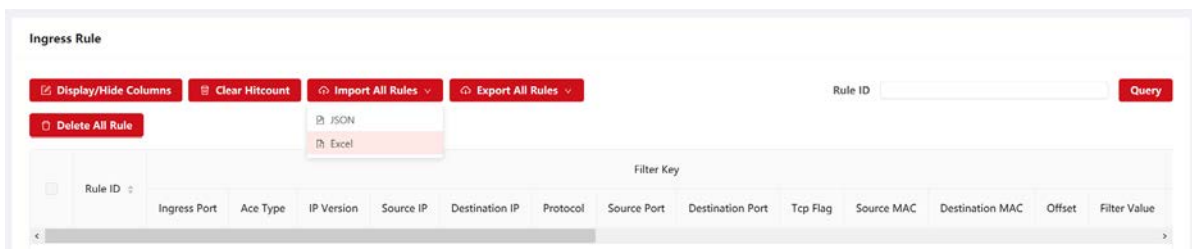

The screenshot displays the 'Ingress Rule' configuration page. It includes buttons for 'Display/Hide Columns', 'Clear Hitcount', 'Import All Rules', 'Export All Rules', and 'Delete All Rule'. A dropdown menu is open, showing options for 'JSON' and 'Excel'. The table below shows the rule configuration:

Rule ID	Ingress Port	Ace Type	IP Version	Source IP	Destination IP	Protocol	Source Port	Destination Port	Tcp Flag	Source MAC	Destination MAC	Offset	Filter Value



## Ordering Information

### Product Components:

- Cubro EXA32400
- AC/DC power supply
- European power cord
- Transceivers not included

Part Number	Description
CUB.SM-EXA32400	EXA32400 Advanced Network Packet Broker, 32x40/100G, AC power supply
CUB.SM-EXA32400-DC	EXA32400 Advanced Network Packet Broker, 32x40/100G, DC power supply

### Spare parts:

Part Number	Description
CUB.PM-AC-E	AC Power supply module for CUBRO EXA32400
CUB.PM-DC-E	DC Power supply module for CUBRO EXA32400

For more information please check our website [www.cubro.com](http://www.cubro.com).